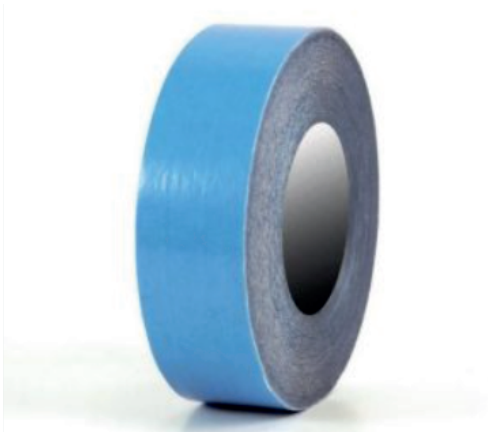

VENTOS

Ventos Double Sided Tape



Properties:



Best performance and long durability!

- Can be torn off by hand
- Extreme adhesion
- Easy and quick installation
- Universally applicable indoors

Product description:

It is used on ceiling joists / rafters, metal studs and metal purlins for applying the membrane instead of using staples. Single-sided paper carrier adhesive tape.

VENTOS
II.

Ventos Double Sided Tape

Product Data Sheet		
Dispersion adhesive		polyacrylate-based
Support system		kraft paper PE-filmed
Reinforcing fabric		NO
Protective cover		YES
Solvents and plasticizers		NO
Thickness	DIN EN 1942	0,30 / 0,36 mm
Sd value		ca. 6 m
Breaking load with elong. at break	DIN EN 14410	≥ 150 N/2mm; 3-5%
Condensation water resistance		high
Aging resistance		particularly high
Initial adhesion (Tack)		excellent
Application temperature		+5°C recommended (processable from -10°C)
Temperature resistance		-30°C / +100°C
Storage location		dry and covered, UV-protected
Storage time		max. 12 months
Storage temperature		+18°C / +25°C

Articles & Units				
Article	Width (m)	Length (m)	Pack (pcs)	Pallet (packs)
1165.12606	60	40	10	60

