


## VENTOS EPDM Membrane



### Typical Uses Include

- Weather & airtight seals around windows, doors and curtain walling systems
- Weather & airtight seals from SFS sections to the concrete frame
- Top of parapet walls
- Balcony waterproofing

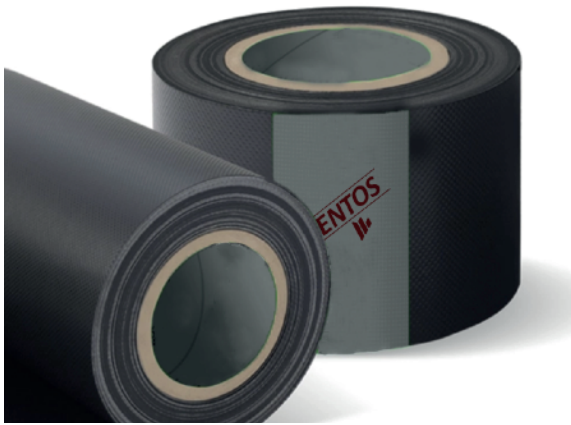

### Product Description

EPDM Membrane is a flexible membrane which is used to create weather and airtight seals around openings such as windows, doors and SFS sections on construction projects. The EPDM has excellent water resistance properties and is BBA approved for façade applications.

Product Specs		
Widths	Lengths	Thickness
50mm - 1500mm	20m	0.5mm, 0.6mm, 0.75mm, 1.0mm, 1.2mm, 1.5mm

Technical Specifications		
Fire Classification	EN 13501-1	E
Watertightness	EN 1928	Pass - 2 kPa for 24 hours
Water Vapour Permeability	EN 1931	50,000µ
Tensile Strength	EN 12311-2	≥7MPa
Air Tightness	EN 12114	<0.1m³

## Paste Adhesive

The Paste Adhesive is a solvent-free, moisture-curing adhesive for horizontal and vertical bonding and sealing of VENTOS EPDM membranes. It is suitable for most common building substrates including metal, wood, aluminium, concrete and PVC.

The adhesive contains no solvents which makes for a smooth, consistent application. The adhesive bond provides excellent resistance to ageing and is fully watertight. Substrates must be clean, dry and free from grease, oil and other contaminants.

Product Specs	
Size	Box Quantity
600ml	12