

VENTOS SD 40 Reflector



Advantages at a glance

The heat-reflecting vapour barrier!

- Airtight
- Barrier against electro smog
- Aluminized surface
- Saves energy
- Reduces costs

Properties:



Classification:



Product Description


Multi-layer, high-gloss vapour barrier for roof and wall.

| Product Data Sheet | | |
|------------------------------|--------------|---------------------------------|
| Material | | PP.PP.PP |
| Film | | PP |
| Colour | | Alu |
| Resistance under PTV | | - |
| Mass per unit Area | EN 1849-2 | 130 g/m ² |
| Thickness | | 0,65 mm |
| Sd value | EN ISO 12572 | ca. 40 m |
| Water Vapour Permeability | EN ISO 12572 | ca. 0,75 g/m ² /24 h |
| Water tightness | EN 13984 | passed |
| Maximum tensile force MD/CD* | EN 12311-1 | 220 / 190 N/50 mm |
| Elongation MD/CD* | EN 12311-1 | 80 / 80 % |
| Tear resistance MD/CD* | EN 12310-1 | 210 / 230 N |
| Fire behaviour | EN 13501-1 | E |
| Outdoor weathering | | 1 months |
| Temperature | | -40°/+ 100°C |

*MD = longitudinal CD = transverse

U Value does not assume any liability if the product is not used as prescribed.

| Articles & Units | | | | |
|------------------|----------------|-----------|------------|--------------------------|
| Article | Article TOP SK | Width (m) | Length (m) | Pallet (m ²) |
| 1183.10021 | - | 1,5 | 50 | 1500 |

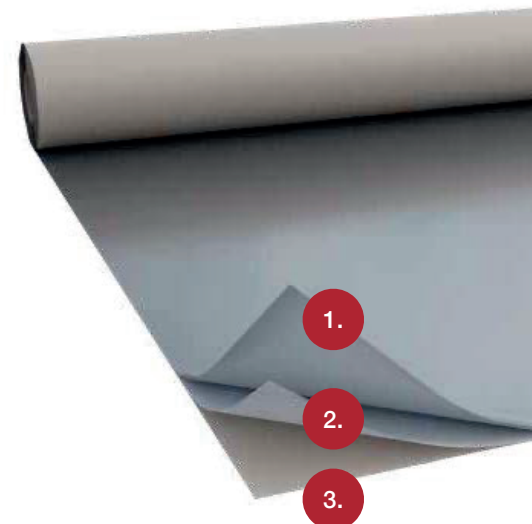

Composition

1. Aluminium Film
2. PE film
3. Protective layer of PP

