



G3 touch
Great Performance
Gentle To Use
Good For Our Environment
NEW GENERATION
MINERAL WOOL INSULATION

Product Information Sheet

Product Name

ISOVER Spacesaver Roll

A mineral wool roll for domestic attic floors. Rolls pre-perforated to 3 x 386cm and 2 x 580cm widths to fit between common joist spacings.

ISOVER G3 Touch - all our mineral wool products are manufactured using G3 Touch technology High performance mineral wool insulation, naturally strong & gentle - made from recycled materials.



ISOVER Spacesaver Roll



ISOVER Spacesaver Roll



W/mK 0.044



Benefits and Features

<p>Thermal</p> <p>Conductivity 0.044 W/mK.</p>	<p>Strength</p> <p>Excellent Recovery and strength.</p>
<p>Acoustic</p> <p>Excellent Acoustic Performance.</p>	<p>Easy to Install</p> <p>Friction fits between timber joists. Easy to install.</p>
<p>Fire</p> <p>Excellent Fire Safety - A1 Fire Rated, highest possible rating. Completely fire safe - Euroclass A1 fire rating when classified in accordance with BS EN 13501-1.</p>	<p>Environmental credentials</p> <p>Made from recycled glass. Minimal manufacturing and on-site wastage. Low carbon footprint at manufacture and during transport.</p>



Standards & Certification

Quality	We hold a Quality Management Standard BS EN ISO 9001: 2008 for manufacturing.	Indoor Air Quality	Awarded the highest standard in indoor air quality - Eurofins "Gold" Label The Gold Certificate means that ISOVER mineral wool is certified as an outstanding material in terms of Indoor Air Quality emissions regulations.
CE	All products are manufactured in accordance with the CE marking requirements under the Construction Products Regulation,	Durability	Fire Performance Euroclass classification of the product is related to the organic content, which cannot increase with time. Thermal conductivity of mineral wool products does not change with time, experience has shown the fibre structure to be stable and the porosity contains no other gases than atmospheric air. (See std EN13162:2012 Annex ZA, Table ZA.1) Will not accelerate corrosion with steel, copper or aluminium. Will not sustain vermin, nor breed or promote fungi or bacteria.
Product Standards	All our products are manufactured in accordance with product standard: BS EN 13162: 2008 and BS EN 13172 Evaluation of Conformity.		
Environment	ISOVER is an ISO 14001:2004 (Environmental Management System) accredited manufacturing facility. This accreditation ensures that all products are manufactured to the stringent standards set out by this management system. EN ISO 13162 EMS 551706 003 BS EN ISO 9001: 2000		

Variants


	Thickness (mm)	Width (mm)	Length (mm)	Pack area (m ²)	Pack per pallet
Spacesaver G3 Touch	100	1160	9170	10.64	24
Spacesaver G3 Touch	150	1160	6030	6.99	24
Spacesaver G3 Touch	170	1160	5390	6.25	24
Spacesaver G3 Touch	200	1160	3880	4.50	24

ISOVER Spacesaver Roll Application

Attic Floors

Insulation Between & Over Joists

- 1 ISOVER insulation between joists
- 2 Second layer of ISOVER insulation cross laid over joists
- 3 Vario® membrane + tapes
- 4 Gyproc WallBoard

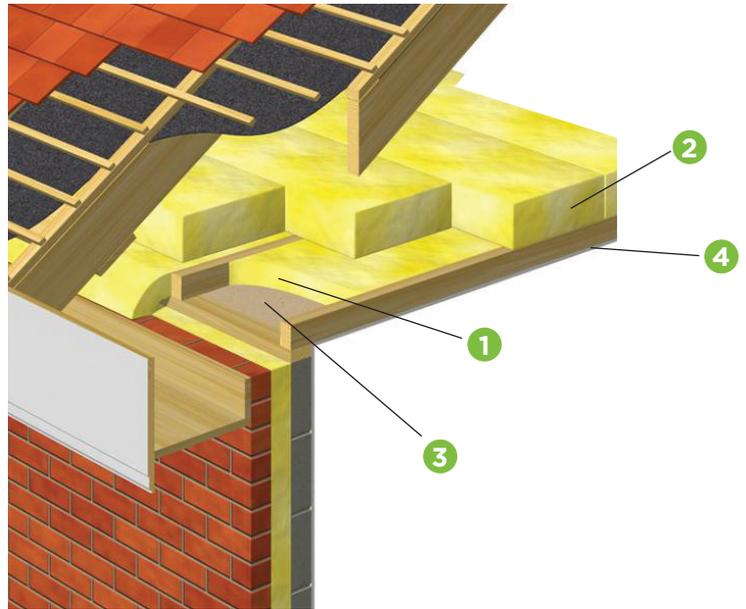

Insulation 1st layer	Insulation 2nd layer	Airtightness/Moisture Control	Board Lining	U-value W/m ² K
100mm Spacesaver	140mm Heatshield	Vario® membrane + tapes	12.5mm Gyproc WallBoard	0.16
150mm Spacesaver	150mm Spacesaver	Vario® membrane + tapes	12.5mm Gyproc WallBoard	0.15
150mm Spacesaver	200mm Spacesaver	Vario® membrane + tapes	12.5mm Gyproc WallBoard	0.13
200mm Spacesaver*	200mm Spacesaver	Vario® membrane + tapes	12.5mm Gyproc WallBoard	0.11

For more applications and product details please visit www.isover.ie



Please contact us for more information on this and other applications:

Free Phone (ROI): 1800 744480

Free Phone (NI): 0845 3990159

Email: tech.ie@saint-gobain.com



SAINT-GOBAIN

ISOVER Ireland

Unit 4, Kilcarbery Business Park,
Nangor Road, Dublin 22
Tel: +353 (0)1 6298400
Email: info@isover.ie
www.isover.ie